
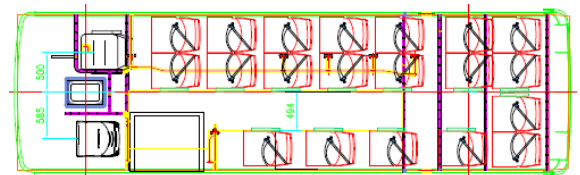



Internal layout

FC70 specifications

Basic Parameters	Model	FC70
	Fuel	Fuel Cell Electric
	LHD or RHD	RHD
	Passenger Capacity	1 Driver – 21 Passenger options
	Dimension (L*W*H, mm)	7495×2100×3150 (Base Model)
	GVM (kg)	9,000
	Tare (kg)	6,000 (TBA)
	Approach/Departure angle (degrees)	TBA
	Min. Turning Diameter (m)	TBA
	Max. Grade (% , 1 min)	22%
	Continuous Max. Grade (%)	18%
	Top Speed (km/h)	80
Range	≥300km (≥550km)	

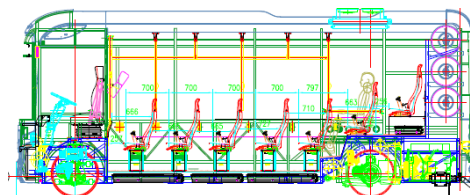

FC70 specifications continued

	Description	Standard	Component Brand
Power System	Traction Battery	31 kWh	✓ CATL
	Hydrogen Fuel Cell	60kW	✓ Ballard
	Drive Motor	E-AXLE	✓
	Controller	HV Inverter	✓
	Hydrogen Tanks	350BAR (700BAR Optional)	✓ Hexagon
	Air Compressor	Electronic air compressor	✓ E-Piston
	Steering Pump	Electric steering pump	✓
Chassis	Suspension	Air suspension	✓
	ECAS	WABCO	✓ WABCO
	Front Axle (1)	Disc brake – Steer axle	✓
	Rear Axle (2)	Drum brake – E-Axle	✓
	Rear Axle (3)	N/A	NA
	Tire	215/75R17.5	✓
	Rim	Aluminum	✓
	Steering System	Hydraulic power steering	✓ E-Pump
	Braking system	WABCO EBS braking system	✓ WABCO
Safety and Electrics	ADAS	Lane departure warning system	Optional Mobileye
	Dashboard	ACTIA	✓ ACTIA
	Camera System	Reversing cameras and buzzer	✓ Included
	Exterior Lamps	LED	✓
	LV Battery	24V maintenance free	✓
	A/C	Cooling and heating A/C	✓ Valeo
	Floor heater	Driver's area heating	N/A
	Fire Extinguisher	HV compartment	✓
	Demister	PTC heater	✓
Body	Body Structure	Monocoque structure, imported stainless steel	✓
	Body Style	City Bus – New Energy style	✓
	Wheelchair Ramp	Flip out ramp	✓
	Side Window	Tempered glass – Emergency exits	✓
	Floor Mats	N/A	
	Floor	Vinyl	✓
	Destination Sign	Front and side standard	✓
	Rear-view Mirror	Camera mirrors	✓
	Front Service Door	Rapid Slider	✓ Ventura
	Middle Service Door	Inward Glider	Optional
	Driver Seat	Air ride driver's seat with seatbelt	✓ ISRI
	Passenger Seat	Standard fixed seat	✓ Fainsa
	USB ports	In dash	Optional
	Wiper	Dual Arm	✓ Doga
	Bell Press System	Wireless	✓ BMAC
	Hand poles	Powder coated	✓

